



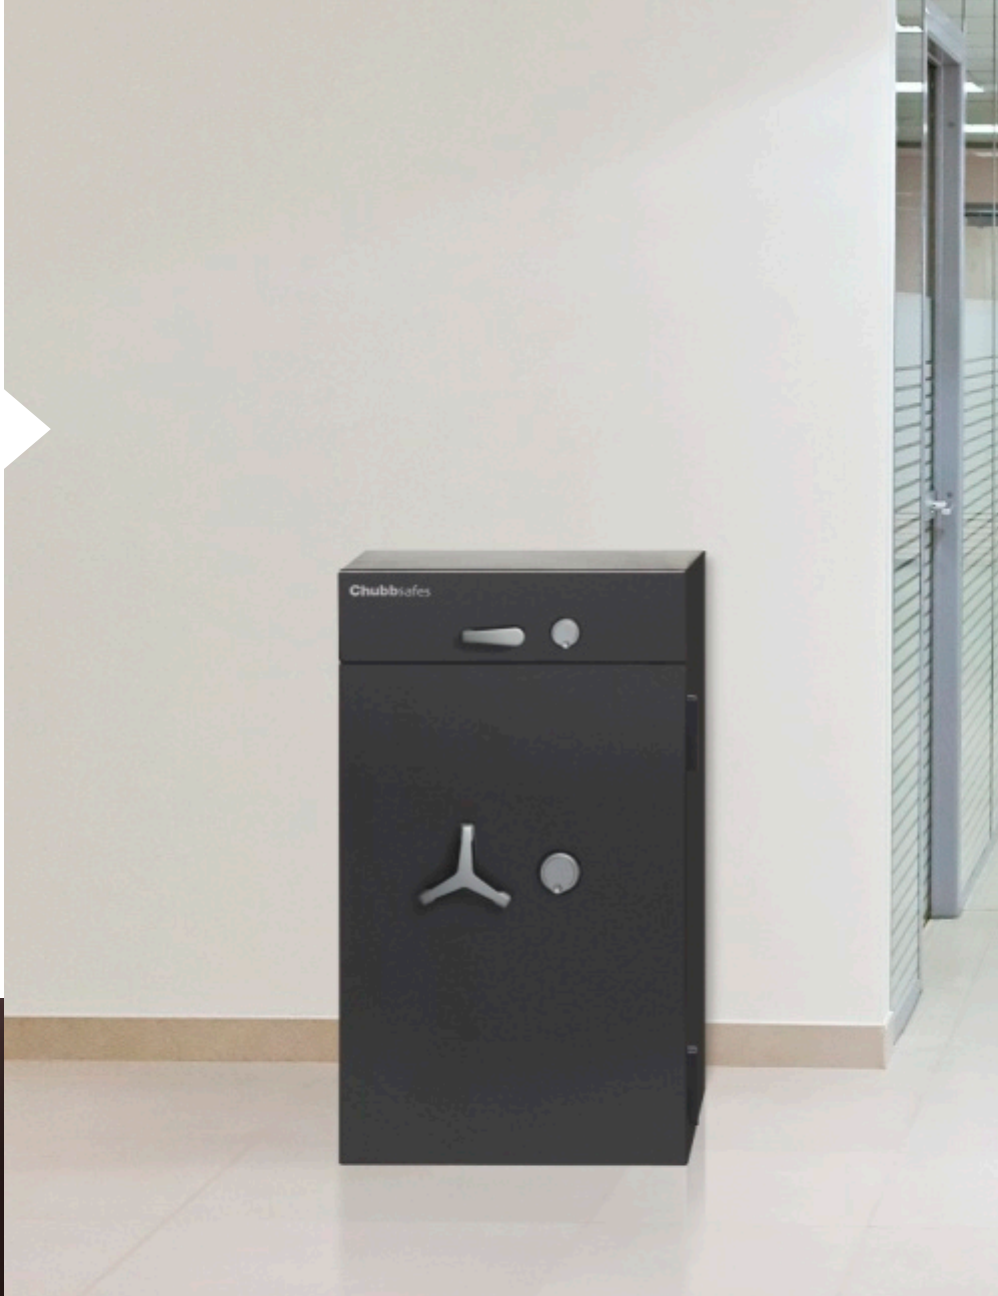

**CERTIFIED** DEPOSIT  
SAFE WHICH MEETS  
**POLICE PREFERRED**  
SPECIFICATION

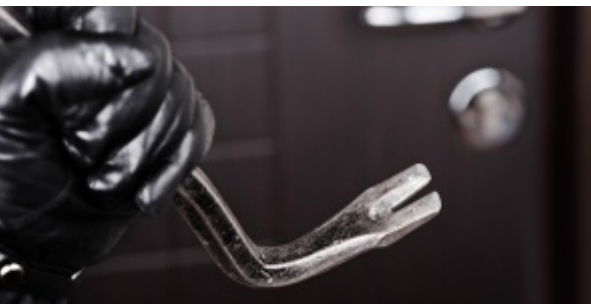

# PROGUARD DT

## BURGLARY-RESISTANT PROTECTION



### KEY FEATURES

- Certified, tested and approved according to the European standard, EN 1143-2, in Grades DI and DII
- EN 1143-2 certified meaning that insurance ratings are not affected by the additional deposit function
- Built using the same technology as the ProGuard, which is certified in accordance with the European standard, EN 1143-1, for Grade II
- Constructed using a new composite material designed for strength and reduction in total weight, keeping transportation and installation costs at a minimum
- Solid steel three-way boltwork
- Anti-fishing device to prevent anyone reaching the contents through the drawer
- Fitted with an active relocker and anti-drilling plates incorporated into the boltwork to resist burglary attempts
- A Class A mechanical key lock or a Class B electronic lock, approved according to EN 1300, available as primary lock options. Electronic locks increase the level of security and prevent unauthorised access
- Drawer trap fitted with a Class A key lock
- Attractive dark grey (RAL 7016) appearance

# PROGUARD DT

## PRODUCT SPECIFICATIONS

Model	External height (mm)	External width* (mm)	External depth** (mm)	Internal height (mm)	Internal width*** (mm)	Internal depth (mm)	Weight (kg) Gd I	Weight (kg) Gd II	Volume (litres)
60	687	500	521	314	400	360	162	302	45
110	847	600	561	474	500	386	218	426	91
150	1052	600	561	659	500	386	242	499	127
200	1307	600	561	934	500	386	290	602	180

\*Projection of hinge (20mm) not included. \*\* Projection of handle (65mm) not included. \*\*\* Width excluding shelf racking strips. Racking reduces the internal width by 15mm.  
 NB. Internal height and litres shown are usable heights and volumes below anti-fishing devices.

### Drawers internal dimensions (mm)

Height	Width model 60	Width model 110–200	Depth
90	350	450	230

## LOCK OPTIONS



The drawer trap is locked with a Class A key lock. The safe can be fitted with either a high-security electronic lock (Class B) or a key lock (Class A).

The primary lock on the safe can be complemented by a combination lock or both a key lock and electronic lock can be fitted.

All locks are tested by ECB•S and are certified in accordance with the EN 1300 standard.

## DRAWER DEPOSIT

Maximum deposit size for model 60 is 30 x 330 x 220 mm

Maximum deposit size for models 110 to 200 is 30 x 430 x 220 mm

## BURGLARY TESTING



ProGuard DT has been certified EN 1143-2 in Grades DI and DII by ECB•S<sup>1</sup>. This fully graded burglary protection means that insurance ratings for the safe are not effected by the drawer trap function.

A range of attack tools were used to test ProGuard DT's level of resistance, from basic tools to sophisticated thermal and electrical equipment.

1. European Certification Board•Security Systems



Approved by the Association of Insurance Surveyors



ProGuard DT is accredited by Secured by Design and meets police approved standards.

Authorised dealer

[www.chubbsafes.com](http://www.chubbsafes.com)