



Fig. Safe BM35, hinge right  
E-Lock M-Locks EM3520, 1 inside locker, 2 pull-out shelves, 1 shelf

-  EN1143-1  
Burglary protection
-  VdS  
Grade II
-  ECB-S  
Grade II
-  ISO  
Class EN 2
-  a2p  
Class II E
-  DIN  
4102 (light fire protection)
-  Domestic insurable  
up to EUR 100.000
-  Commercial insurable  
up to EUR 50.000

### [ Safes ]

### [ Type BM ]

BM series safes offer lots of space and the option of additional locks to give dual control. All models are pre-fitted to enable connection to a burglar alarm system. Armoured, high resistant barrier material ensures a grade II classification.


### [ Product information ]

- Hinge** DIN right – model designation R  
option: DIN left
- Door opening angle** 180°
- Body** double-walled, filled with armoured, high resistant barrier material
- Door structure** triple-walled, filled with armoured, high resistant barrier material, internal boltwork protected by sheets of hardened steel to give extra anti-drill resistance
- Locking mechanism** three-way moving boltwork with large steel bolts protected by additional emergency re-lockers, continuous fixed full height bolt on the hinge side
- Anchoring** prepared for floor and rear wall anchoring  
anchoring bolts and shields are supplied  
option: additional anchoring holes (customer specifies position)
- Alarm connection** VdS-certified cable channels to allow connection to a burglar alarm system
- Colour** inside and outside RAL 7037 dusty grey  
option: special colour according to RAL
- Lock** model designation K – double-bit lock VdS class 1, Cawi 2 keys (95 mm)  
model designation E – electronic lock VdS class 2, M-Locks EM3520  
option: other lock models (primary lock or possible secondary locks)
- Equipment** shelf adjustable (height setting 85 mm)  
option: additional shelf, inside locker, drawer, pull-out shelf, key rack
- Accessories** option: certified steel plinth to raise the level of the safe,  
fire protection door rebate seals, alarm switch set,  
interior lighting

Model	Outside dimensions h x w x d (mm)	Inside dimensions h x w x d (mm)	SH	Volume (l)	Weight (appr. kg)
BM10RK / BM10RE	395 x 545 x 442	345 x 495 x 310	1	53	135
BM15RK / BM15RE	565 x 545 x 442	515 x 495 x 310	1	79	170
BM20RK / BM20RE	735 x 545 x 442	685 x 495 x 310	1	105	205
BM25RK / BM25RE	905 x 545 x 442	855 x 495 x 310	2	131	240
BM30RK / BM30RE	1075 x 545 x 442	1025 x 495 x 310	2	157	275
BM35RK / BM35RE	1245 x 545 x 442	1195 x 495 x 310	3	183	310
BM40RK / BM40RE	1415 x 545 x 442	1365 x 495 x 310	3	209	345

SH = Shelf

### [ Equipment options ]

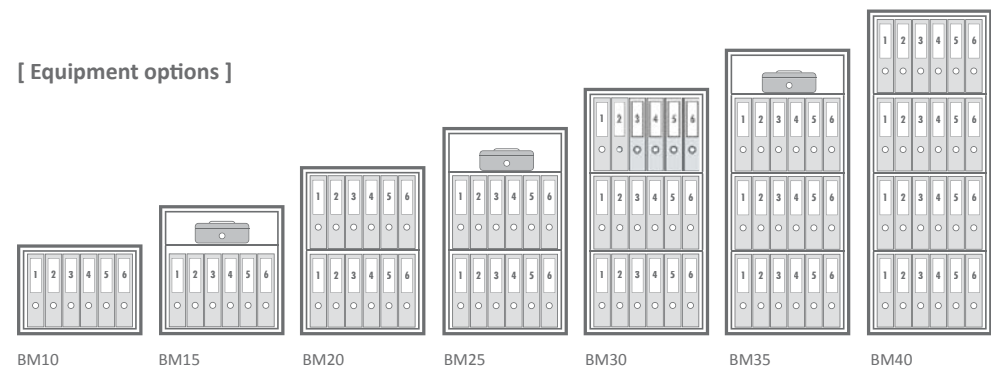

BM10

BM15

BM20

BM25

BM30

BM35

BM40